


PRODUCT - INFORMATION # 01/ 2014

New from HL



HL520F / HL520F.0

Shower tray syphon DN40/50 for shower trays with hole Ø90mm

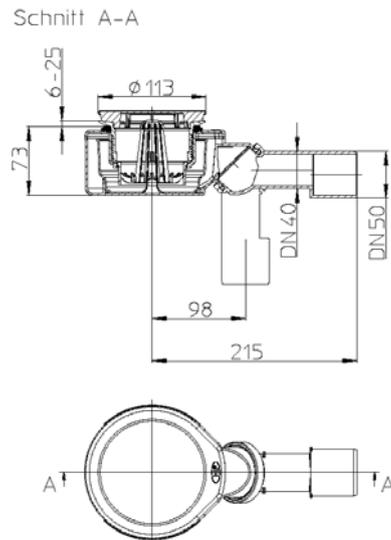

Product Description

All in one - flexible installment, highest flow rate and Easy- to-clean drain.

HL520F has a PE outflow pipe for connection to PE- and pluggable pipes. At the same time it can be connected to DN40 and 50; and horizontal and vertical, too. It has 50mm of water sealing and provides one of the highest flow rates in the class. It is very easy to clean, in just two steps. When the rubber trap (syphon) is removed, the plumber has direct access to the drain pipe to clean it.

HL520F - The highest quality standard drain for professional plumber

Main Features:

• Installation:

- Using the supplied blanking plate / mounting wrench the screw valve is connected to the valve seal and the drain body with the shower tray.
- Installation key protects against contamination during construction.
- By the rotatable connecting piece only **ONE PRODUCT** is necessary for vertical and horizontal connection. The joint also facilitates the installation by setting the proper pipe slope.

• Cleaning: Only two steps are needed:

1. Remove the cover
2. Pull out and clean hair sieve.

• What to do if the syphon is blocked?

The additional hair sieve already prevents in advance the blocking of the drain pipe and ensures long use of the siphon. The flexible drain trap made of natural rubber can be removed in order to allow access to the drain pipe. And, if the syphon is unblocked and clean, the rubber can be inserted very easy.

• Additional hair sieve: Prevents in advance blocking of the drain pipe.

- Water trap: Removable, allows access to the drain pipe.
- Sealing: Attached to the drain body, slipping during installation is prevented.
- Connection : DN40/50, pluggable and weldable (PE), rotatable for horizontal or vertical connection
- Height: just 73mm (with 50mm water sealing)
- Drainage capacity (horizontally installed): DN40 + DN50 - 0.6 l / s (standard requirement EN274 □ 0.4 l / s)
- Drainage capacity (vertically installed): DN40 - 0.7 l / s DN 50 - 0,8 l / s

Spare parts:

HL0520.0E
Montage assist (PP)



HL522.1
Cover plate Ø113mm



<p>HL0520F.3E Hair strainer (PP) 50mm sealing water height</p>	
<p>HL0520F.2E Trap insert (NK / SBR) flexible and removable, material resistant to house wastewater</p>	
<p>HL0520.1E Screw valve (PP) Standardized clamping range of 6-25mm Suit with 3mm thread pitch.</p>	
<p>HL01108D Valve seal (NK / SBR) for secure tight connection of drain and shower tray</p>	
<p>Drain body(PP) with installation height (with valve gasket) - 73mm Outflow pipe DN40/50 (PE) weldable horizontal/vertical rotatable plug.</p>	
<p>HL520F.0 Same as HL520F but without a cover</p>	
<ul style="list-style-type: none">• Packaging: 1 pcs in a box, 182 pcs / pallet.• Weight: HL520F: Net 450g• HL52F.0: Net 360g• HL520F - EAN-simple: 9003076037452• HL520F - EAN-multiple: 9003076037469• Prices: See Pricelist (as HL520)	